


technical guide

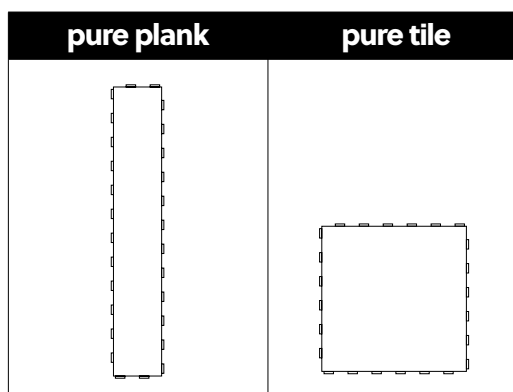

Total thickness	EN ISO 24346	5 mm	
Dimensions	-	1326 x 204 mm	612 x 612 mm
Thickness of the wear layer	EN ISO 24340	0,55 mm	
Click system	-	DreamClick®	
Total weight	EN ISO 23997	5,61 kg/m ²	
Usage classification	EN ISO 10874	23/33/42	

Test results

Underfloor heating	EN ISO 12524	Suitable max 27°C (80°F) electrical floorheating systems max 60 W/m ²
Castor chair	EN ISO 4918	Pass
Fire resistance	EN ISO 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	< 0,10 mm
Slip resistance	DIN 51130	R11
	EN ISO 13893	Class DS
RRL pendulum test: dry	CEN/TS 15676	53
RRL pendulum test: wet	CEN/TS 15676	34.4
Sound reduction: impact sound	EN ISO 717-2	10 dB
Reflected walking sound	EPLF 021029- F1	*** 9,2 sone
Light fastness	EN ISO 105-B02	>6
Dimensional stability	EN ISO 23999	≤ 0,15 %
Residential warranty	-	Lifetime
Commercial warranty	-	10 years
Formaldehyde	EN ISO 717-1	E1



Phthalate Free

